

PFOA and Associated Salts

Ecotoxicity Elements

Title	Laboratory or Author	Completion Date	Type
Activated Sludge Respiration Inhibition Test - FC-1015-X	3M Env. Lab	4/25/96	Robust summary, copies of data sheets
Acute Toxicity of FC-1015 to the Fathead Minnow, <i>Pimephales promelas</i>	T.R. Wilbury Laboratories, Inc, Marblehead, MA	5/15/96	Robust summary, final report
Growth and Reproduction Toxicity Test with FC-1015 and the Freshwater Alga, <i>Selenastrum capricornutum</i>	T.R. Wilbury Laboratories, Inc, Marblehead, MA	5/15/96	Robust summary, final report
Acute Toxicity of FC-1015 to the Daphnd, <i>Daphnia magna</i>	T.R. Wilbury Laboratories, Inc, Marblehead, MA	5/15/96	Robust summary, final report
Summary Reports			
Title	Laboratory or Author	Completion Date	Type
Technical Report Summary - Final Comprehensive Report: FC 143	3M Env. Lab	3/23/79	Robust summary, technical report

STUDY SUMMARY FOR WORK PERFORMED DURING 1977-1979

TEST SUBSTANCE

Identity: Perfluorooctanoic acid, ammonium salt; may also be referred to as PFOA ammonium salt, Ammonium perfluorooctanoate, PFO, FC-116, FC-126, FC-169, or FC-143. (Octanoic acid, pentadecafluoro-, ammonium salt, CAS # 3825-26-1)

Remarks: The subject material is FC-143. It's purity was not sufficiently characterized at the time these tests were conducted, though current information indicates it is a mixture of 96.5 - 100% test substance and 0 - 3.5% C₆, C₇, and C₉ perfluoro analogue compounds.

The attached is an overview created in 1979 for studies completed from 1977 to 1979. Robust summaries have already been submitted for many of these studies. Others have not been summarized due to the fact that the original studies were not found.

STUDIES

Water solubility; degradation; soil sorption; partition coefficient; aquatic tox

Remarks: The attached document includes a solubility value and an octanol/water partition coefficient value that could not be confirmed through our available archived reports. Their origin is therefore unknown.

DATA QUALITY

Reliability: These studies have varying Klimisch rankings, though most would be designated a "3". In many cases actual concentrations were not measured. The value was determined by indirect measurement (e.g., bioconcentration analyzing for F) or using nominal concentrations (e.g., aquatic toxicity). Often the test procedure methodology was not noted. In some cases, the analytical methodology itself was questionable. Additionally, these studies lack sufficient characterization of the test substance purity.

REFERENCES

3M Technical Report "Final Comprehensive Report: FC 143." A. N. Welter, Project 9770612643, Report number 012, March 23, 1979

OTHER

Submitter: 3M Company, Environmental Laboratory, P.O. Box 33331, St. Paul, Minnesota, 55133

Last changed: 5/25/00

C04123



Form 6747-11-A

TECHNICAL REPORT SUMMARY

Date
March 23, 1979

TO: TECHNICAL COMMUNICATIONS CENTER - 201-2CN

(Important - If report is printed on both sides of paper, send two copies to TCC.)

Division Environmental Laboratory (EE & PC)	Dept. Number 0535
Project Fate of Fluorochemicals	Project Number 9970612643
Report Title Final Comprehensive Report: FC 143	Report Number 012
To R. A. Prokop	
Author(s) <i>A. N. Welter</i> A. N. Welter	Employee Number(s) 09362
Notebook Reference	No. of Pages Including Coversheet 11

SECURITY ▶ <input type="checkbox"/> Open <input checked="" type="checkbox"/> Closed	3M CHEMICAL REGISTRY ▶	New Chemicals Reported <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
---	------------------------	---

KEYWORDS:
(Select terms from 3M
Thesaurus. Suggest other
applicable terms.)

EE&PC - Div.
Fluorochemical
(Analytical)
(Aquatic)
(Degradation)
(soil)
Toxicity

CURRENT OBJECTIVE:

Final Report: Encompasses all work performed during
the period; 1977-1979.

REPORT ABSTRACT: (200-250 words) This abstract information is distributed by the Technical Communications Center to alert 3M'ers to Company R&D.

cc: D.L. Bacon
R.L. Bohon
Y. Pothapragada

Information Liaison
Initials: *SKW*

004124


1 2 0

INTRODUCTION

The rationale for performing environmental effects studies on fluorochemicals has been discussed previously^(1,2)

The subject fluorochemical of this report is FC 143, a anionic surfactant, which has the potential for widespread distribution in the environment as this material is used by the Teflon(R) coating industry, both domestically and internationally. FC 143 chemically is the ammonium salt of perfluoro-octanoic acid.

This material is a white granular powder having a molecular weight of 431 and the chemical structure shown below.



-FC 143

This report consolidates all available information in the areas of water solubility, partition coefficients, degradation, soil sorption and aquatic toxicity. The probable environmental risk of FC 143 is defined.

METHODS

Water solubility, biodegradation and soil sorption methodology's have been the subject of technical reports⁽¹⁻³⁾.

A) Aquatic Toxicity Testing

The testing protocols utilized for this study were modeled after that described by USEPA (1975)⁽⁴⁾.

1. Bluegill Sunfish

The bluegill sunfish (*Lepomis macrochirus*) used in this study were obtained from a private hatchery.^a Stock fish were held in fiberglass holding tanks filled with carbon-filtered well water maintained at 14-15°C. A daily photoperiod of 16 hours light and 8 hours dark, with a 30-minute transition period, was maintained throughout the acclimation and testing period. The fish were fed Tetra-Min^b daily, food being withheld 48 hours prior to and throughout the test period. Fish were acclimated for 14 days prior to testing.

Acute short-term (96-hour) static aquatic bioassays were performed on FC 143, lot 340. Carbon-filtered well water of known composition was used as the diluent. All glass aquaria, 35 x 20 x 20 cm, containing 16 liters of water or water plus FC 143 comprised a study chamber.

^aDale Fattig Fish Farm, Brady, Nebraska

^bCommercial fish food of known composition.

Twenty bluegill sunfish, (*Lepomis macrochirus*), uniform in size and weight, were tested at each concentration of FC 143. Test fish were randomly assigned to various test chambers within 30 minutes following FC 143 addition. Test temperatures were maintained at $19^{\circ} \pm 1^{\circ} \text{C}$. Mortality, temperature, dissolved oxygen level, and pH of all test solutions were measured at 24-hour intervals or until total mortality had occurred. General observations relative to behavioral or erratic swimming patterns were similarly recorded when appropriate. Organisms used in this study were considered to be generally healthy and free of disease.

2. Aquatic Invertebrates - 48 hour Static LC₅₀

Daphnia magna, twenty organisms per test chamber, were exposed to FC 143, lot 340 at varying concentrations for 48 hours. - First instars were counted and placed in carbon-filtered well water, with chemical added and solubilized prior to the addition of the *Daphnia magna*.

Invertebrate test concentrations were 7.5, 10, 18, 32 and 56 mg/l while vertebrate test concentrations were 420, 560, 750, 1000, and 1350 mg/l.

LC₅₀ values with 95% confidence limits were calculated using the USEPA (Duluth) Probit computer program on the 3M Trac system.

RESULTS

Table 1 lists water solubility and partition coefficient data obtained using FC 143, lot 340. This material is extremely water soluble, >20 g/l. FC 143 when added to water appeared to form a gel although further additions of FC 143 were similarly absorbed. This material is slightly lipophilic as evidenced by a partition coefficient of 5. Based on these data it can be concluded that FC 143 would not bioconcentrate to an appreciable extent in the environment. Chiou et al⁽⁵⁾ have described an empirical relationship between the water solubility of a chemical and its bioconcentration factor. In their system, the ascribed error is considered to be approximately one order of magnitude. When applying data generated for FC 143 to this proposed relationship, this material would be projected to possess a bioconcentration factor of approximately 10.

TABLE 1 Water Solubility and Partition Coefficient of FC 143

Parameter	Test	Results
Solubility	Coarse method	>20 g/l as <u>gel</u>
Partition Coefficient	n-octanol/water	5

FC 143 was found to be completely resistant to biodegradation under the test conditions employed⁽²⁾. The 2 1/2 month shake culture biodegradation study utilized microbial test cultures derived from activated sludge inocula obtained from the Chemolite, Decatur and Twin Cities Metro Plan waste treatment system. During the time course of this study a strain of microbes which could degrade FC 143 did not develop, hence this material would be expected to persist in the environment for extended periods of time unaltered by microbial catabolism.

Soil sorption studies have shown that approximately 5%, (range 2-7%), of the FC 143 present in a water solution was adsorbed to Brill sandy loam soil (Table 2)⁽³⁾. Conversely, approximately 80% of the amount of FC 143 adsorbed to this soil would be desorbed after three (3) desorption trials (Table 2). Mobility of FC 143 was calculated using the scheme described by Hamaker⁽⁶⁾ whereby adsorption coefficients are converted to a constant, K_{oc} , which reflects the organic content of the soil. This^{oc} investigator has shown that the relative mobility of a group of pesticides could be determined in this fashion and that the K_{oc} value could be correlated with pesticide mobility. In applying this test, FC 143 had a K_{oc} value of 17, being slightly less mobile than chloramben, K_{oc} of 12-8, which was the most mobile pesticide based on Hamaker's work⁽⁶⁾.

Table 2 Soil Sorption Tests on FC 143

Parameter	Test	Solution	Results
Soil Sorption	Adsorption	Water	~ 5%, range 2-7%
	Desorption	Water	80% of amount adsorb.
	K_{oc}		17

Results of the acute static aquatic tests are tabulated (Table 3). Based on the aquatic toxicity criteria established by NIOSH, FC 143 would be considered practically non-toxic to the vertebrates and invertebrates used in this test⁽⁷⁾. It is to be noted that the invertebrate data correlate well with those data obtained when testing fresh warm water species. This correlation has been observed repeatedly⁽⁸⁻¹⁰⁾.

Egg-fry studies were contracted to EG&G Bionomics Laboratory and their results comprise Tables 4 and 5. These studies were undertaken to assess the effect of FC 143 at sublethal levels on hatchability, survival, weight and length changes (Table 4). It is generally accepted that the immature or young stages of an aquatic species are quite sensitive indicators

Table 3 FC 143, Results of 96 Hour Acute Static Testing
Limits

Test Organisms	96 Hr. LC ₅₀ mg/l	Lower, mg/l	Upper mg/l
Bluegill Sunfish	569	500	636
Daphnia magna	632	570	699
	632	570	698

Table 4 Percentage Egg Hatch, Percentage Survival, Total Length and Wet Weight of Fathead Minnow Fry (*Pimephales promelas*) during Exposure to varying concentrations of FC 143 ^{a, b}

Concentration mg/l	30 Days Post Hatch			
	Hatch %	Survival %	Length mm	Weight mg
100	96	85	20.5	59.5
50	92.5	94	20	62.5
25	99	92.5	21	72
12.5	90.5	97.5	21	71
6.2	94.5	93	21	69
Control	96.5	93.5	20.5	68.5

^aWork performed by EG&G Bionomics Laboratory, Inc.

^bSummary table submitted to Environmental Laboratory, 3M, St. Paul, as part of final report.

of chemically induced toxicity. In the parameters under investigation no statistically significant differences were obtained. At the highest FC 143 concentration tested, 100 mg/l, reductions were recorded in survival percent and weight 30 days post hatch. Although these data are suggestive of a latent onset in the development of cumulative toxicity, the dose levels of FC 143 at which these phenomena were observed far exceed, (several orders of magnitude), the environmental concentrations of FC 143.

Based on the results of the histopathological examination, a 30-day exposure to 100 mg/l FC 143 did not contribute to abnormal histopathology (Table 5). Both groups of organisms exhibited fatty liver changes, 6/10 controls and 5/10 treated organisms. Similarly, gill hyperplasia was seen in both groups, 3/10 controls and 2/10 treated fry.

Table 5 Histopathological Examination of Fathead Minnow Fry (*Pimephales promelas*) exposed 30-days to 100 mg/l FC 143^{a, b}

Test Material	Number of Observations	Histopathological Findings
Control	10	6/10 fatty liver changes 3/10 normal 3/10 gill hyperplasia
100 mg/l FC 143	10	5/10 normal 5/10 fatty liver changes 2/10 gill hyperplasia

DISCUSSION

The primary purpose of this report is to provide a single source for all environmental data generated relating to FC 143 and to provide an analysis of potential environmental risk.

In developing this analysis two model types will be discussed: (1) a schematized closed system environment and 2) a practical model based on use of FC 143 at a manufacturing site and consumer product usage.


1. Closed System

The environment can be considered to be a closed system, schematically represented as:



Chemicals entering this system might establish an equilibrium between two or all three compartments, remain confined within a single compartment or perturbate all phases of the depicted cycle.

Specifically we can represent the impact of FC 143 in the following manner:

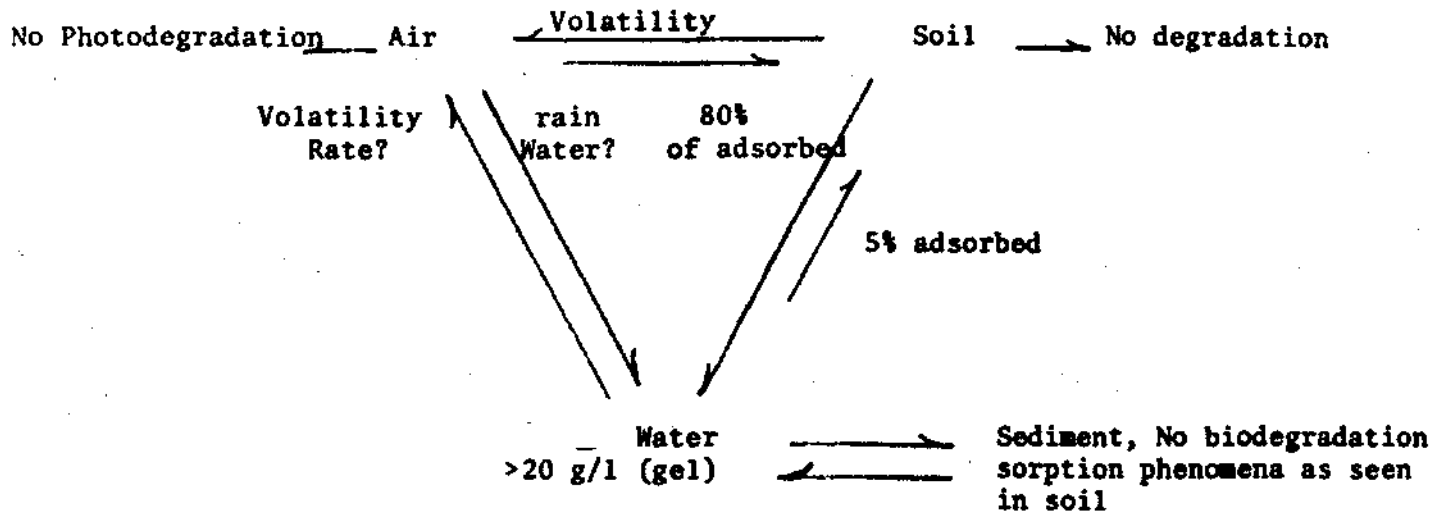

As illustrated, FC 143 enters the environment primarily by means of the waterways and secondarily via the terrestrial ecosystem and atmosphere. This material does not adsorb permanently to either soil and/or sediment, remaining however in the water compartment. It is not known whether FC 143 is volatile, a fact which assumes importance in light of the finding that FC 143 does not undergo photolysis. (11) Based on the foregoing, the waterways apparently are the environmental sink for FC 143. Intermediate receptors have not been identified.

2. Manufacturing and Consumer Model

The following construct illustrates various pathways wherein FC 143 may enter the environment at the processing site.

FC 143 Anionic Surfactant

↓
Manufacturer

↓
Photographic Industry — Process Teflon^R Coating —> Consumer

↓
Wastes

Liquid

Solid

↓
Waste Treatment

Incinerate

Landfill

↓
Ash

↓
Soil

↓
Effluent Outfall

↓
Sludge

↓
Volatility

River
H₂O

Landfill

Soil
Incorporation

Air

H₂O

Soil

Volatility

Sediment

Leach

Volatile

Volatility

Air

Soil

Fish

H₂O

Air

H₂O

Leach

Air


H₂O

Soil

↓
Birds

H₂O

CO4131

The above figure depicts projected pathways wherein FC 143 might enter the environment. In discussing use of FC 143 by the Teflon^(R) coating and photographic industries with Dr. M. Pike, Commercial Chemical Division, I was informed that to their knowledge no FC 143 wastes would be generated by the Teflon^(R) coating process. Based on this information, I have depicted this no waste situation by the following sign; .

In discussing the manufacture of FC 143 with Jerry Hoffer, Chemolite, a similar observation to that outlined above was made.

In view of the above we can project the environmental concentration under conditions wherein all FC 143 manufactured is lost to the environment.

Since waterways are the environmental sink for FC 143, a simplistic model utilizing a single point source for FC 143 and a river would enable one to project an estimated environmental concentration for FC 143 under a worst case situation.

We have made several assumptions which are considered basic to this simplistic model:

- 1) Total production is at Chemolite and all FC 143 produced is discharged.
- 2) No FC 143 is removed by the treatment facility.
- 3) All effluent is discharged into the Mississippi River.
- 4) FC 143 is discharged uniformly.
- 5) River flow and all other parameters are constant, hence not subject to seasonal and/or climatic perturbations.

The formulae used in these projections include:

- 1) $MG/min = \frac{(River\ Flow,\ CFM)(Conversion,\ gal/ft^3)(Time,\ min)}{Production,\ per\ annum}$
- 2) $MG/min \times 1440 = MG/Day$
- 3) $Lbs/day = (mg/l \times wt.\ lbs.\ H_2O\ per\ gal)(MG/Day)$

Mississippi River flow at Hastings, MN, based on a 10 year low flow record is 10,000 CFS.

The total 5 year production figures were provided by D.R. Ricker, Commercial Chemicals Division. In utilizing these figures an estimated environmental concentration of FC 143 in the Mississippi River below Chemolite was calculated. During the period 1973-1978, the EEC for FC 143 was calculated

004132

to be 1.6 $\mu\text{g}/\text{l}$ at Hastings, Mn., while the EEC projected for the period 1978-1983 is projected at 2.4 $\mu\text{g}/\text{l}$. Since the water compartment is the environmental sink for FC 143, it is determined that at the present and projected levels of production FC 143 will not present an unreasonable environmental risk under worst case situations.

CONCLUSIONS

Under the test conditions employed in characterizing selected physicochemical and environmental properties of FC 143 it has been determined that this material

- 1) is extremely water soluble, forming a gel at 20 g/l.
- 2) has an n-octanol/water partition coefficient of ~ 5
- 3) is resistant to microbial degradation
- 4) is extremely mobile in Brill sandy loam soil
- 5) in an egg-fry study did not affect hatchability, survival, length or weight following a 30 day exposure to FC 143 at sublethal levels to a statistically significant degree. Similarly, no adverse effect was noted on tissues examined for evidence of chemical induced pathology.
- 6) is to be found primarily in the water compartment, hence its environmental sink. No specific intermediate receptors have been identified.
- 7) would have an estimated environmental concentration of approximately 1.6-2.4 $\mu\text{g}/\text{l}$, under conditions wherein all FC 143 were manufactured at Chemolite and discharged into the Mississippi River.
- 8) will not present an unreasonable environmental risk based on present and projected production levels, usage patterns etc.

BIBLIOGRAPHY

1. Mendel, A., Technical Report: "Analytical Methodology and Support", January 17, 1979.
2. Reiner, E.A., Technical Report: "Biodegradation Studies of Fluorocarbons - III", July 19, 1978.
3. Welsh, S.K., Technical Report: "Adsorption of FC 95 and FC 143 on Soil", February 27, 1978.
4. US/EPA - Methods for Acute Toxicity Test with Fish, Macro-invertebrates and Amphibians, Ecological Research Series 660/3-75-009, 1975.
5. Chiou, Cary T., Virgil H. Freed, David W. Schmedding, and Rodger L. Kohnert: Partition Coefficient and Bioaccumulation of Selected Organic Chemicals, Environmental Science and Technology, 11(5): 475-478, 1977.

004133

6. Hamaker, J.W., "Interpretation of Soil Leaching Experiments" in Chemicals, Human Health and the Environment, A Collection of Dow Scientific Papers, Vol. 1, Dow Chemical USA Midland, Michigan 48640.
7. Registry of Toxic Effects of Chemical Substances, '76 Edition, Christensen, H.E., and E.J. Fairchild, Eds. p.xv and Ci, US Department of Health, Education, and Welfare; National Institute for Occupational Safety and Health, Washington, D.C., June, 1976.
8. Welter, A.N., Technical Report: Aquatic Toxicity Studies, FC 214-30 lot 566, February 16, 1979.
9. Welter, A.N., Technical Report: Aquatic Toxicity Studies, FC 232 lot 610, January 17, 1979.
10. Welter, A.N., Technical Report: Final Comprehensive Report, FC 95 March, 1979.
11. Todd, J.W., Technical Report: FC 143 Photolysis Study using Simulated Sunlight, February 2, 1979.
12. Welter, A.N. Technical Report: Final Comprehensive Report on FM 3422, February 2, 1979.

004134